


SL(F)-Twin solenoids, proportional

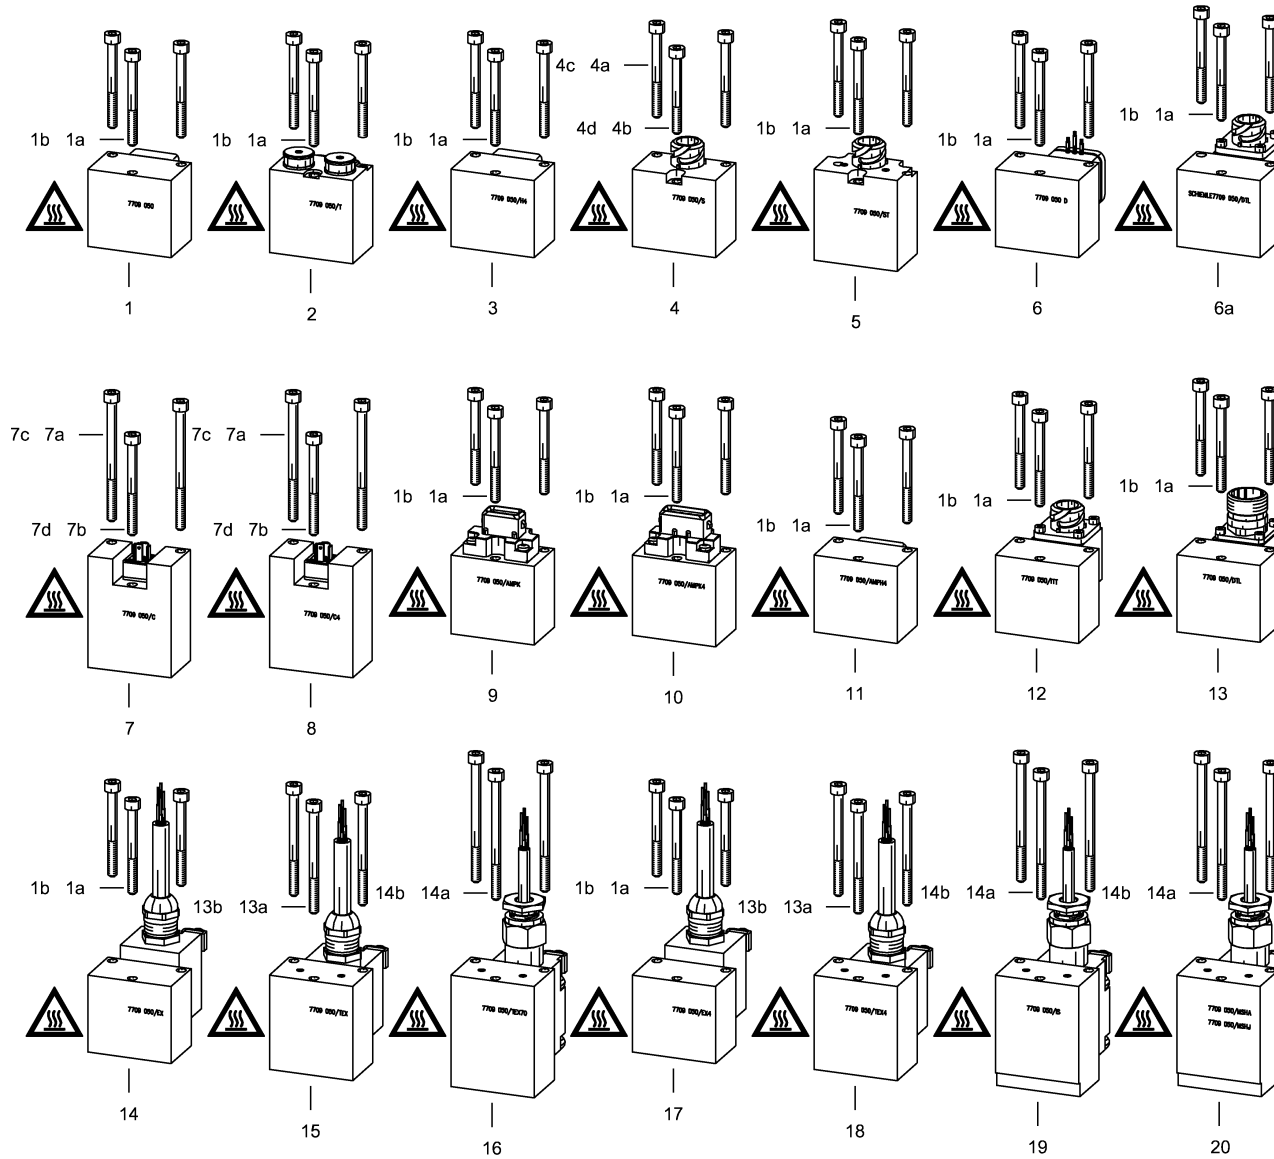

SL(F)-Twin solenoids, proportional

| Part No. | Qty. | Item | Nomenclature | Drawing No. | Add. Information |
|-------------|------|------|---|----------------------|--|
| 4704 859100 | 1 | 1 | TWIN SOLENOID PROP. | 7709 050-12 V | 12V DC (7709 050/HS; 7709 050/MSM) |
| 4704 859200 | 1 | 1 | TWIN SOLENOID PROP. | 7709 050-24 V | 24V DC (7709 050/HS; 7709 050/MSM) |
| 4704 868300 | 1 | 2 | PROP. TWIN SOLENOID ND WITH MAN.EMERGENCY ACTUATION | 7709 050/T-12 V | with emergency actuation; 12V DC (7709 050 B/HS) |
| 4704 868400 | 1 | 2 | PROP. TWIN SOLENOID ND WITH MAN.EMERGENCY ACTUATION | 7709 050/T-24 V | with emergency actuation; 24V DC (7709 050 B/HS) |
| 4704 873600 | 1 | 3 | TWIN SOLENOID | 7709 050/H 4-G 12 | 12V DC (7709 050/HS4) |
| 4704 873700 | 1 | 3 | TWIN SOLENOID | 7709 050/H 4-G 24 | 24V DC (7709 050/HS4) |
| 4704 867900 | 1 | 4 | TWIN SOLENOID PROP. CO.SCHLEMMER | 7709 050/S-12 V | 12V DC (7709 050/HSS) |
| 4704 868000 | 1 | 4 | TWIN SOLENOID PROP. CO.SCHLEMMER | 7709 050/S-24 V | 24V DC (7709 050/HSS) |
| 4704 877100 | 1 | 5 | TWIN SOLENOID PROP-SCHL.HNOT | 7709 050/ST-12 V | 12V DC (7709 050B/S) |
| 4704 877000 | 1 | 5 | TWIN SOLENOID PROP-SCHL.HNOT | 7709 050/ST-24 V | 24V DC (7709 050B/S) |
| 4704 403800 | 1 | 6 | TWIN SOLENOID PROP. | 7709 050 D-12 V | 12V DC Not available any more! |
| 4704 403700 | 1 | 6 | TWIN SOLENOID PROP. | 7709 050 D-24 V | 24V DC Not available any more! |
| 4704 811200 | 1 | 6a | TWIN SOLENOID PROP. O.MIL-DTL389 | 7709 050/DTL-12 V | 12V DC |
| 4704 811300 | 1 | 6a | TWIN SOLENOID PROP. O.MIL-DTL389 | 7709 050/DTL-24 V | 24V DC |
| 4704 408700 | 1 | 8 | TWIN SOLENOIDT PROP. 4-PIN PLUG "C" | 7709 050/C4-G 12 | 12V DC (7709 050A/H4) |
| 4704 408800 | 1 | 8 | TWIN SOLENOID PROP. 4-PIN PLUG "C" | 7709 050/C4-G 24 | 24V DC (7709 050A/H4) |
| 4704 463300 | 1 | 9 | TWIN SOLENOID-12 V | 7709 050/AMPK-12 | 12V DC (7709 050A/AMP3H) |
| 4704 462500 | 1 | 9 | TWIN SOLENOID-24 V | 7709 050/AMPK-24 | 24V DC (7709 050A/AMP3H) |
| 4704 463100 | 1 | 10 | TWIN SOLENOID-12 V | 7709 050/AMPK4-12 | 12V DC (7709 050A/AMP4H) |
| 4704 462400 | 1 | 10 | TWIN SOLENOID-24 V | 7709 050/AMPK4-24 | 24V DC (7709 050A/AMP4H) |
| 4704 463600 | 1 | 11 | TWIN SOLENOID 24 V | 7709 050/AMPH4-24 | |
| 4704 879800 | 1 | 12 | TWIN SOLENOID WITHOUT HD WITH ITT-CANNON | 7709 050/ITT-12 V | 12V DC (7709 050A/ITT) |
| 4704 878100 | 1 | 12 | PROP. TWIN SOLENOID ITT24-V | 7709 050/ITT-24V | 24V DC (7709 050A/ITT) |
| 4704 811300 | 1 | 13 | TWIN SOLENOID PROP. O.MIL-DTL389 | 7709 050/DTL-24 V | 24V DC |
| 4704 890100 | 1 | 14 | TWIN SOLENOID PROP. EEX LEAD LENGTH 10 METER | 7709 050/EX-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 A EEX) |

SL(F)-Twin solenoids, proportional

| Part No. | Qty. | Item | Nomenclature | Drawing No. | Add. Information |
|-------------|------|------|---|---------------------|--|
| 4704 890200 | 1 | 14 | TWIN SOLENOID PROP. EEX LEAD LENGTH 3 METER | 7709 050/EX-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 A EEX) |
| 4704 905000 | 1 | 14 | TWIN SOLENOID PROP. EXX 20 METER CABLE LENGTH | 7709 050/EX-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 A EEX) |
| 4704 890700 | 1 | 15 | TWIN SOLENOID PROP. EEX WITH MAN. EMERGENCY ACTUATION, CABLE LENGTH 3 METER | 7709 050/TEX-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 B EEX) |
| 4704 890900 | 1 | 16 | TWIN SOLENOID PROP. EXX 70° C WITH MAN. ACTUATION, CABLE LENGTH 3 METER | 7709 050/TEX70-24 V | 24V DC; Please follow the operation manual B ATEX B09/2006! (7709 050 B EEX70) |
| 4704 891000 | 1 | 16 | TWIN SOLENOID PROP. EXX 70° C WITH MAN. ACTUATION, CABLE LENGTH 10 METER | 7709 050/TEX70-24 V | 24V DC; Please follow the operation manual B ATEX B09/2006! (7709 050 B EEX70) |
| 4704 891200 | 1 | 17 | TWIN SOLENOID PROP. EEX4 3 METER | 7709 050/EX4-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 A EEX4) |
| 4704 891300 | 1 | 18 | TWIN SOLENOID PROP. EXX4 3 METER WITH MANUAL EMERGENCY ACTUATION | 7709 050/TEX4-24 V | 24V DC; Please follow the operation manual B ATEX B01/2002! (7709 050 B EEX4) |
| 4704 404800 | 1 | 19 | TWIN SOLENOID SCH-12V - 5 METER CABLE LENGTH | 7709 050/IS-12 V | 12V DC; Please follow the operation manual B ATEX B04/2005! (7709 050/1 B EXI-SCH) |
| 4704 404900 | 1 | 19 | TWIN SOLENOID SCH-12V - 10 METER CABLE LENGTH | 7709 050/IS-12 V | 12V DC; Please follow the operation manual B ATEX B04/2005! (7709 050/1 B EXI-SCH) |
| 4704 902800 | 1 | 20 | TWIN SOLENOID MSHA 3 METER CABLE LENGTH 01 EX05 053A 2424 | 7709 050/MSHA-24 V | 24V DC; Please follow the operation manual B ATEX B05/2006! (7709 050 B MSHA) |
| 4704 903300 | 1 | 20 | TWIN SOLENOID MSHA 10 METER CABLE LENGTH 01 EX05 053C 2424 | 7709 050/MSHA-24 V | 24V DC; Please follow the operation manual B ATEX B05/2006! (7709 050 B MSHA) |
| 4704 903600 | 1 | 20 | MSHA SOLENOID WITH JOY-PLUG | 7709 050/MSHJ-24 V | 24V DC; Please follow the operation manual B ATEX B05/2006! (7709 050 B MSHJ) |
| 6005 042400 | 3 | 1a | SKT.-HEAD SCREW ISO 4762 - M 5 X 50 - A 2-70 | | |
| 6005 046100 | 3 | 1b | SKT.-HEAD SCREW ISO 4762 - M 5 X 70 - A2 - 70 | | For vers. with twin solenoid spacer |
| 6005 042400 | 2 | 4a | SKT.-HEAD SCREW ISO 4762 - M 5 X 50 - A 2-70 | | |
| 6005 043400 | 1 | 4b | SKT.-HEAD SCREW ISO 4762- M 5 X 45 - A 2-70 | | |
| 6005 046100 | 2 | 4c | SKT.-HEAD SCREW ISO 4762 - M 5 X 70 - A2 - 70 | | For vers. with twin solenoid spacer |
| 6005 321100 | 1 | 4d | SKT.-HEAD SCREW | | For vers. with twin solenoid spacer |
| 6005 046100 | 2 | 7a | SKT.-HEAD SCREW ISO 4762 - M 5 X 70 - A2 - 70 | | |
| 6005 045700 | 1 | 7b | SKT.-HEAD SCREW ISO 4762- M 5x55 - A 2-70 | | |
| 6005 009900 | 2 | 7c | SKT.-HEAD SCREW ISO 4762- M5 X 90 - A2-70 | | For vers. with twin solenoid spacer |
| 6005 025200 | 1 | 7d | SKT.-HEAD SCREW ISO 4762- M 5x75 - 8.8 - A2K | | For vers. with twin solenoid spacer |
| 6005 047200 | 3 | 13a | ISO 4762 - M 5 X 60 - A4 - 80 SKT.-HEAD SCREW | | |
| 6005 043500 | 3 | 13b | SKT.-HEAD SCREW | | For vers. with twin solenoid spacer |
| 6005 046100 | 3 | 14a | SKT.-HEAD SCREW ISO 4762 - M 5 X 70 - A2 - 70 | | |

SL(F)-Twin solenoids, proportional

| Part No. | Qty. | Item | Nomenclature | Drawing No. | Add. Information |
|-----------------|-------------|-------------|---|--------------------|-------------------------------------|
| 6005 009900 | 3 | 14b | SKT.-HEAD SCREW ISO 4762- M5 X 90 - A2-70 | | For vers. with twin solenoid spacer |