



Struthers-Dunn

407 East Smith Street, Suite B

Timmonsville, SC 29161

Telephone: (843)346-4427


Fax: (843)346-4465

Email: info@struthers-dunn.com

Website: www.struthers-dunn.com

Item # 33377 SOCKET/FRONT CONN., Industrial 14 Pin Socket

These industrial style 14 Pin Panel Mount sockets offer front-connected wiring on one level with screw terminals accessible and numbered for ease in installation and wiring. Sockets are polarized. The mating relay has a locking clip that snaps into the socket, eliminating any need for external holding devices.

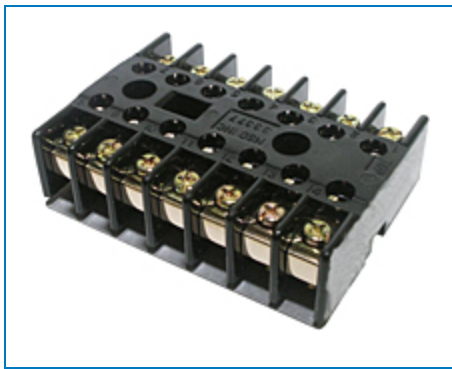

[Specifications](#) | [Construction](#) | [Electrical Rating](#) | [Temperature](#) | [Dielectric Strength](#) | [Miscellaneous](#)

Specifications

Style 14 Pin panel mount socket with removable screws

Weight 120 g

Construction

Internal Metal Tracks Copper alloy

Screws Terminals Steel, zinc plated

Screw Style and Size	Combination Head - M3.5x0.06x6.35MM
Screw Terminals Torque Maximum	9 lb-in, 1.01 Nm
Insulation Material	Base- Black Phenolic, Ammonia Free, ASTM-D-700 Class 2 Insulating Plate- Electric Grade Fish paper

Electrical Rating

Nominal Voltage Rating	600 V
Nominal Current Rating	10 A

Temperature

Operating	-40 to 80 °C
------------------	--------------

Dielectric Strength

Output to Adjacent Output Terminals	2000 Vrms
Output to Input Terminals	2000 Vrms
Terminals to Rail Chassis	2000 Vrms

Miscellaneous

Chassis Mount Screw Torque	8- 10lb, 0.90 Nm
Flammability Rating	94V-0
Wire Size	20 -12 AWG, 0.5 - 3mm
Body Color	Black